


CERAMIC ENCLOSURE CRYSTAL RESONATORS (SMD)

SMCE-7050

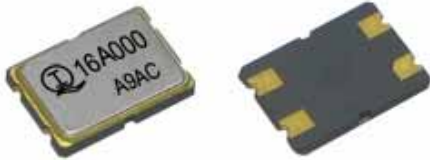

FEATURES

- Surface mount ceramic enclosures
- High reliability seam welded seal
- Wide frequency range




Item		Specifications
Nominal Frequency Range	f_0	6.0MHz ~ 30.0MHz (Fundamental)
		30.0MHz ~ 80.0MHz (3.O.T)
Frequency Tolerance, $T_a=25^\circ\text{C} \pm 3^\circ\text{C}$	$\Delta f/f$	$\pm 30\text{ppm}$
Load Capacitance	C_L	18pF
Frequency Tolerance over Operating Temperature Range	$\Delta f/f$	$\pm 30\text{ppm}$
Operating Temperature Range	T_{OPR}	$-10^\circ\text{C} \sim +70^\circ\text{C}$
Storage Temperature Range	T_{STG}	$-55^\circ\text{C} \sim +125^\circ\text{C}$
Drive Level	DL	0.1mW (0.5mW Max.)
Shunt Capacitance	C_0	7pF Max.
Insulation Resistance	IR	500M Ω Min.
Aging	Δf_A	$\pm 3\text{ppm/Year Max.}$

SERIES RESISTANCE (ESR)

Frequency Range	$6 < f_0 < 8$	$8 < f_0 < 16$	$16 < f_0 < 30$	$30 < f_0 < 40$ (3.O.T)	$40 < f_0 < 80$ (3.O.T)
ESR	100 Ω Max.	80 Ω Max.	50 Ω Max.	100 Max.	80 Max.


Please consult our sales representatives for other specifications.

DIMENSION (mm)

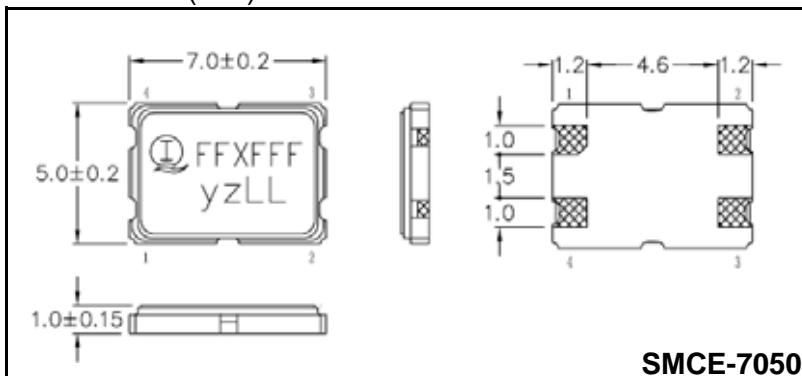

SMCE-7050

SOLDERING PATTERN (mm)

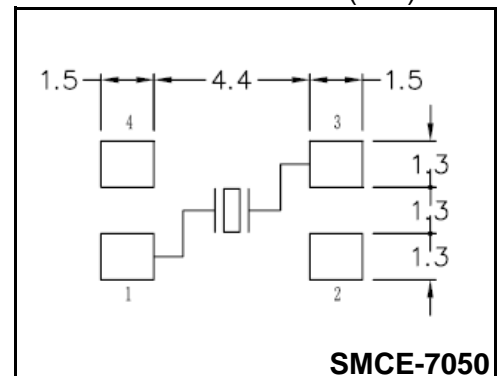

SMCE-7050

All specifications are subject to change without notice.



Interquip Electronics Co., Ltd

Flat A, 9/F, On Shing Industrial Building, 2-16 Wo Liu Hang Road, Fotan, Hong Kong
 Tel: +852 2413 5515 Fax: +852 2413 7053 <http://www.interquip.com>