

CERAMIC FILTER

LTS / LTT



LTS



LTT




LTS						
Series	Nominal Center Frequency (MHz)	3dB Band Width (KHz) min.	20dB Band Width (KHz) min.	Insertion Loss (dB) max.	Spurious Attenuation (0-fn)(dB) min.	Input / Output Impedance ()
LTS4.5MCB	4.500	fn±60	600	6.0	30	1000
LTS4.5MDB	4.500	fn±70	750	6.0	30	1000
LTS5.5MCB	5.500	fn±60	600	6.0	30	600
LTS5.5MDB	5.500	fn±80	750	6.0	30	600
LTS6.0MCB	6.000	fn±60	600	6.0	30	470
LTS6.0MDB	6.000	fn±80	750	6.0	30	470
LTS6.5MCB	6.500	fn±70	650	6.0	30	470
LTS6.5MDB	6.500	fn±80	800	6.0	30	470


LTT						
Series	Nominal Center Frequency (MHz)	3dB Band Width (KHz) min.	20dB Band Width (KHz) min.	Insertion Loss (dB) max.	Spurious Attenuation (dB) min.	Input / Output Impedance ()
LTT4.5MA	4.500	fn±40	370	10.0	40(4.5±1.0MHz)	1000
LTT4.72MA	4.724	fn±40	370	10.0	40(4.72±1.0MHz)	1000
LTT5.5MA	5.500	fn±50	350	9.0	50(5.5±1.0MHz)	600
LTT5.74MA	5.742	fn±50	350	9.0	50(5.74±1.0MHz)	600
LTT6.0MA	6.000	fn±50	400	9.0	50(6.0±1.0MHz)	470
LTT6.25MA	6.250	fn±50	400	9.0	50(6.25±1.0MHz)	470
LTT6.5MA	6.500	fn±50	400	9.0	50(6.5±1.0MHz)	470
LTT6.74MA	6.742	fn±50	400	9.0	50(6.74±1.0MHz)	470

Please consult our sales representatives for other specifications.

DIMENSION (mm)

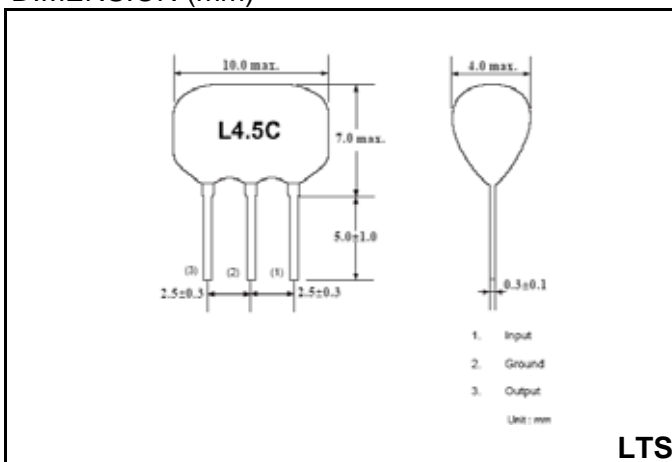

LTS

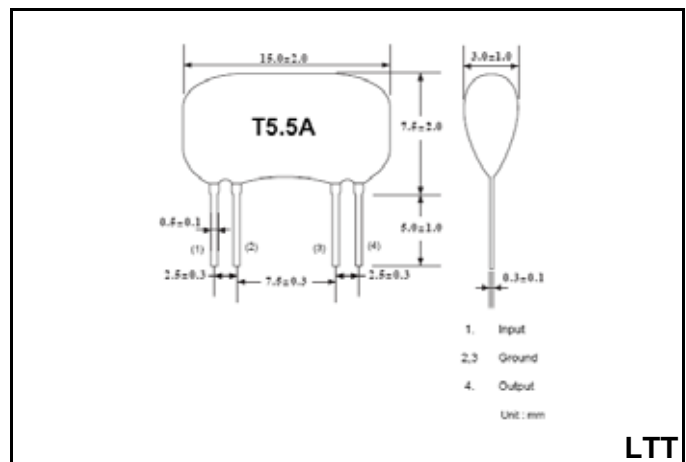

LTT

All specifications are subject to change without notice.



Interquip Electronics Co., Ltd

Flat A, 9/F, On Shing Industrial Building, 2-16 Wo Liu Hang Road, Fotan, Hong Kong
 Tel: +852 2413 5515 Fax: +852 2413 7053 <http://www.interquip.com>