10.7MHz SMD CERAMIC FILTER

LTCV / LTCS

LTCV				
Series	3dB B.W (KHz)	20dB B.W (KHz)	Insertion Loss (dB)	Spurious Attenuation (9-12MHz)(dB) min.
LTCV10.7MHY	110 ± 30	350	6.0 ± 2.0	35
LTCV10.7MJ	150 ± 40	380	5.5 ± 2.0	35
LTCV10.7MS3	180 ± 40	470	4.0 ± 2.0	35
LTCV10.7MS2	230 ± 50	510	3.5 ± 2.0	35
LTCV10.7MA5	280 ± 50	590	3.0 ± 2.0	35
LTCV10.7MA20	330 ± 50	700	3.0 ± 2.0	30
LTCV10.7MA19	f_n ± 175 min	950	3.0 ± 2.0	20 (5~15MHz)

LTCS				
Series	3dB B.W (KHz)	20dB B.W (KHz)	Insertion Loss (dB)	Spurious Attenuation (9-12MHz)(dB) min.
LTCS10.7MS3	180 ± 40	470	4.5 ± 2.0	30
LTCS10.7MS2	230 ± 50	510	3.5 ± 2.0	30
LTCS10.7MA5	280 ± 50	590	3.0 ± 2.0	30
LTCS10.7MA20	330 ± 50	700	3.0 ± 2.0	30

Please consult our sales representatives for other specifications.

DIMENSION (mm)

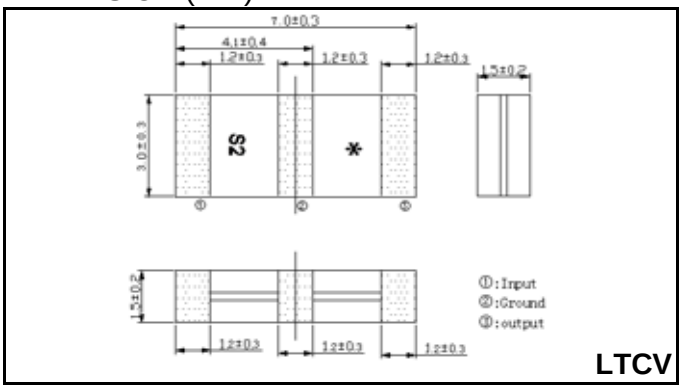

LTCV

DIMENSION (mm)

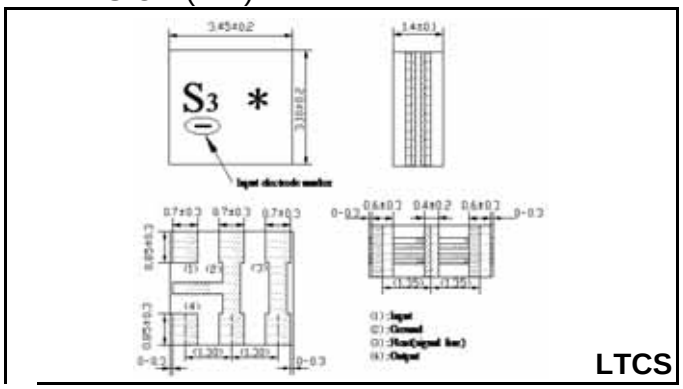

LTCS

SOLDERING PATTERN (mm)

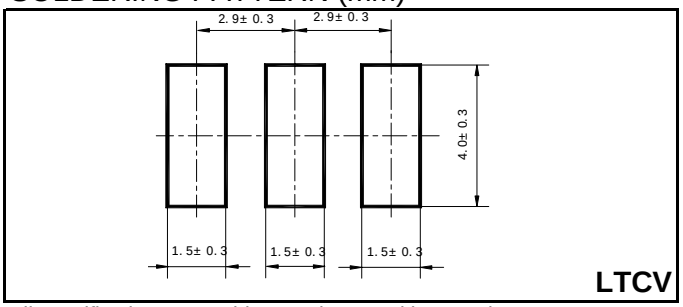

LTCV

SOLDERING PATTERN (mm)

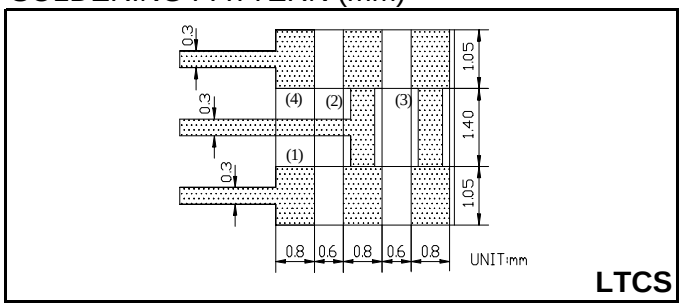

LTCS

All specifications are subject to change without notice.

Interquip Electronics Co., Ltd
Flat A, 9/F, On Shing Industrial Building, 2-16 Wo Liu Hang Road, Fotan, Hong Kong
Tel: +852 2413 5515 Fax: +852 2413 7053 http://www.interquip.com